


CPVC SCHEDULE 80 FITTINGS

Weights, Dimensions and Tolerances


SECTION

Wyes

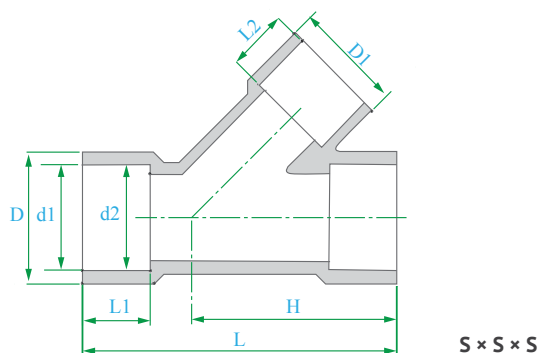

PART	NOMINAL SIZE	WYE - S x S x S	UNIT OF MEASURE: MM					
		D	d1	d2	L1	L	H	APPROX. WT.
0308.WYE.0050	1/2"	31.00	21.54	21.23	22.30	82.50	50.80	-
0308.WYE.0075	3/4"	37.30	26.87	26.57	25.40	94.50	58.70	-
0308.WYE.0100	1"	43.00	33.65	33.27	28.60	111.10	71.40	-
0308.WYE.0125	1 1/4"	54.80	42.42	42.04	31.80	128.60	85.70	-
0308.WYE.0150	1 1/2"	62.70	48.56	48.11	35.00	146.00	100.00	-
0308.WYE.0200	2"	77.00	60.63	60.17	38.20	175.40	120.60	-
0308.WYE.0250	2 1/2"	88.90	73.38	72.85	44.50	209.50	154.00	-
0308.WYE.0300	3"	109.50	89.31	88.70	44.70	244.50	173.00	-
0308.WYE.0400	4"	136.50	114.76	114.07	57.20	297.00	209.50	-
0308.WYE.0600	6"	196.00	168.83	168.00	76.20	403.00	311.00	-
0308.WYE.0800	8"	258.00	219.84	218.70	102.00	600.00	435.80	-

Crosses

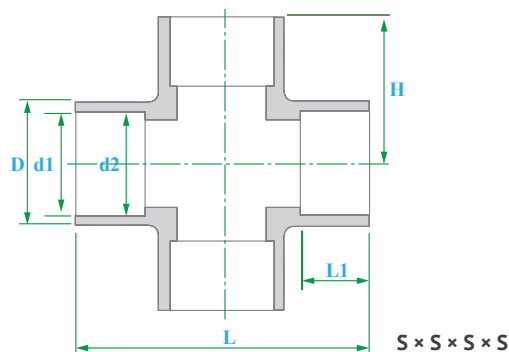

PART	NOMINAL SIZE	CROSS - S x S x S x S	UNIT OF MEASURE: MM					
		D	d1	d2	L1	L	H	APPROX. WT.
0308.CRS.0050	1/2"	30.20	21.54	21.23	69.00	22.30	34.10	-
0308.CRS.0075	3/4"	35.00	26.87	26.57	82.50	25.40	41.30	-
0308.CRS.0100	1"	42.80	33.65	33.27	106.40	28.60	53.20	-
0308.CRS.0125	1 1/4"	52.40	42.42	42.04	119.00	28.60	59.50	-
0308.CRS.0150	1 1/2"	61.90	48.56	48.11	133.40	35.00	66.70	-
0308.CRS.0200	2"	77.80	60.63	60.17	152.40	38.20	76.20	-
0308.CRS.0250	2 1/2"	91.30	73.38	72.85	174.60	44.50	87.30	-
0308.CRS.0300	3"	106.30	89.31	88.70	200.00	47.70	100.00	-
0308.CRS.0400	4"	133.30	114.76	114.07	247.60	57.20	123.80	-
0308.CRS.0600	6"	190.50	168.83	168.00	533.40	76.20	266.70	-

Notes: Physical dimensions and tolerances meet the requirements of ASTM Standards F-439 for socket type fittings and F-437 for threaded fittings. CPVC material meets ASTM Standard D-1784. Dimensions are subject to change without notice. Contact your HYDROSEAL representative for certification.